

Specification



JU6500V-3450

JUPITER 5 Series: Two-Platen Servo-Hydraulic



Clamping Unit		JU6500V
Clamping Force	kN	6500
	US Tons	731
Mold Opening Stroke (Min/Max)	mm	1350/800
	in.	53.15/31.5
Minimum Mold Height	mm	400
	in.	15.75
Maximum Mold Height	mm	950
	in.	37.4
Maximum Daylight	mm	1750
	in.	68.9
Distance Between Tie-Bars (HXV)	mm	1040×910
	in.	40.94×35.83
Platen Dimensions (HXV)	mm	1400×1350
	in.	55.12×53.15
Ejector Stroke	mm	250
	in.	9.84
Ejector Force	kN	110
	US Tons	12
Maximum Mold Weight*	t	9.5
	lbs.	20944



Specification



JU6500V-3450

JUPITER 5 Series: Two-Platen Servo-Hydraulic

Injection Unit		3450		
Screw & Barrel Designation		A	B	C
Screw Diameter	mm	70	80	85
	in.	2.76	3.15	3.35
Screw L/D Ratio	L/D	22.9	20	19.1
Injection Volume (theoretical)	cm ³	1423	1859	2099
	cu.in.	86.84	113.44	128.09
Injection Weight (PS)	g	1295	1692	1910
	oz.	45.68	59.68	67.37
Injection Rate (PS)	g/s	402	525	593
	oz./s	14.18	18.52	20.92
Injection Pressure	MPa	208	159	141
	psi	30168	23061	20450
Injection Pressure (max)*	MPa	239	183	162
	psi	34664	26542	23496
Plasticizing Rate (GPPS)	g/s	69.8	92	101
	oz./s	2.46	3.25	3.56
Plasticizing Rate (HDPE)	g/s	105.1	141.5	159.7
	oz./s	3.71	4.99	5.63
Screw Speed	rpm	220	220	220

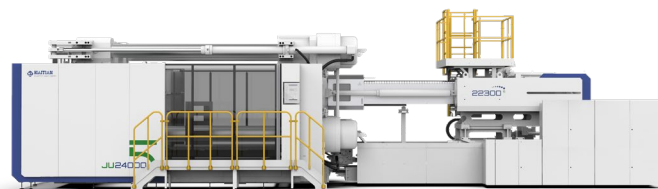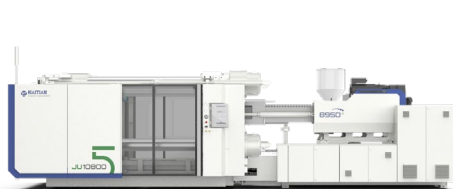

Specification




JU6500V-3450

JUPITER 5 Series: Two-Platen Servo-Hydraulic


Other		
Pump Motor Power	kW	65
Heater Power	kW	39
Machine Dimension (LxWxH)	m	7.58×2.58×2.51
	in.	298×102×99
Machine Weight	t	24
	lbs.	52911
Hopper Capacity	kg	50
	lbs.	110
Oil Tank	l	430
	gal	114

***NOTE:**

1. Injection Pressure (max) uses the machine's regeneration oil circuit to increase the injection pressure. This function will reduce injection control and repeatability. The standard "Injection Pressure" specification is the maximum injection pressure in a normal operating mode.
2. Moving platen max mold weight is 2/3 of total max mold weight.
3. Electric screw drive (screw rotate) is standard for injection units under 11500. For injection units 11500 and above electric screw drive is optional.
4. Machine dimensions and weights are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Absolute Haitian service department for machine specific information.
5. Power requirements are based on the international standard configuration and are for reference only. Any options or country specific requirements will affect this. Contact Absolute Haitian service department for machine specific information.

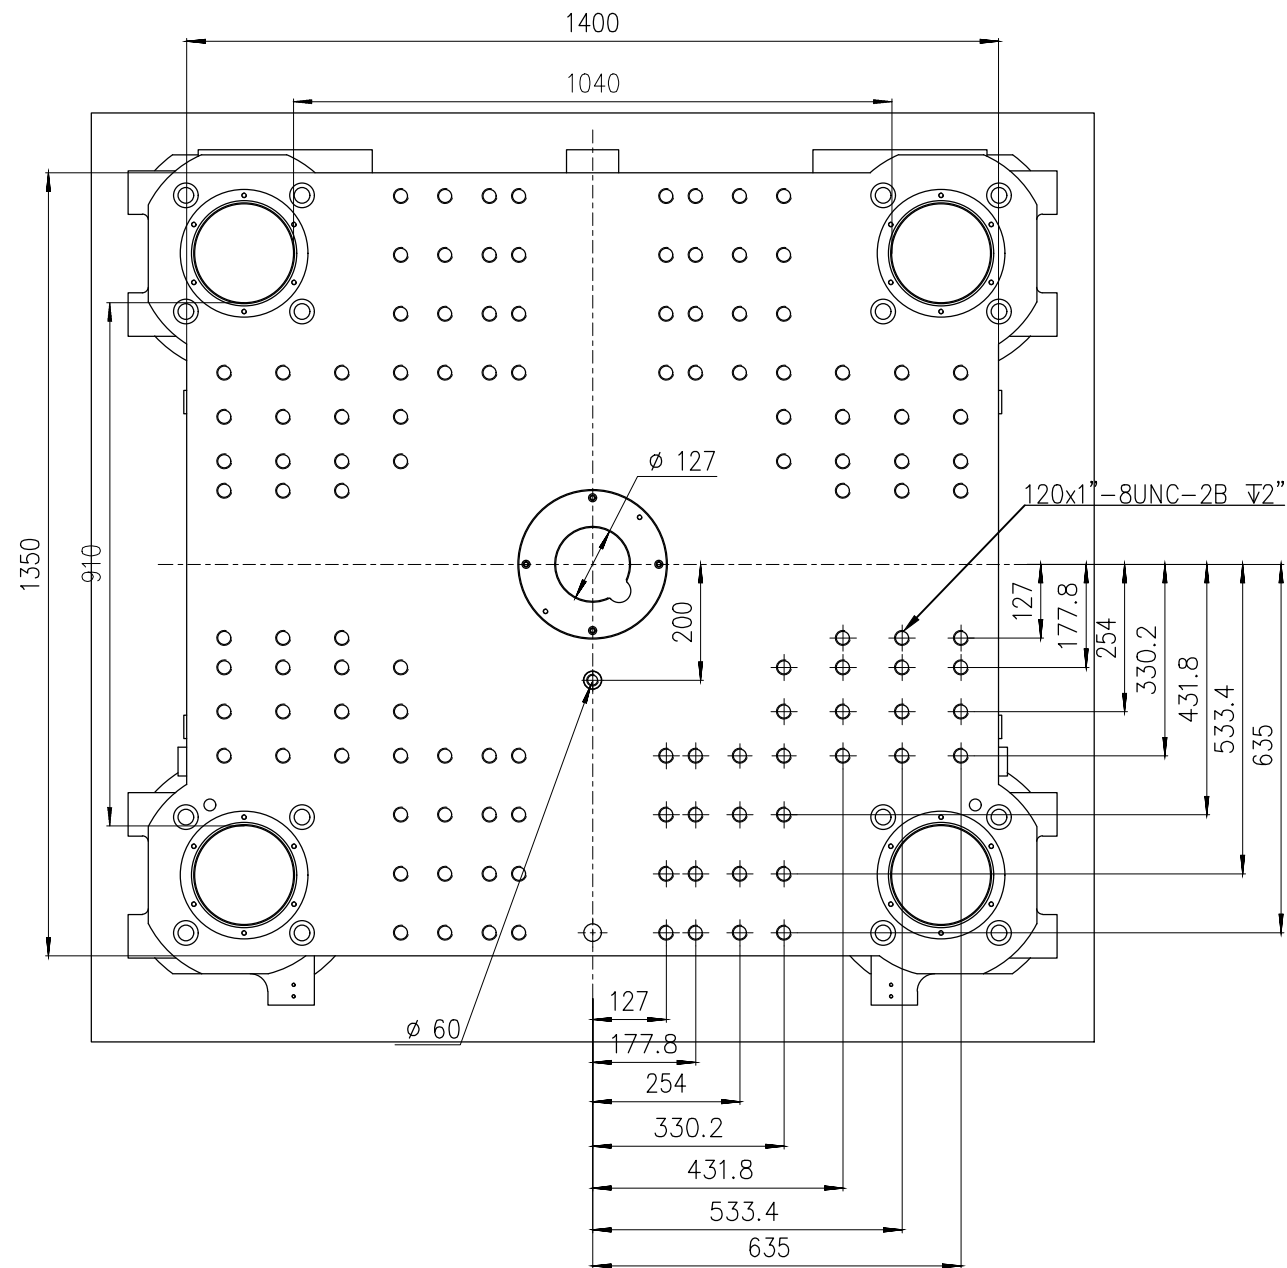

Fixed Platen

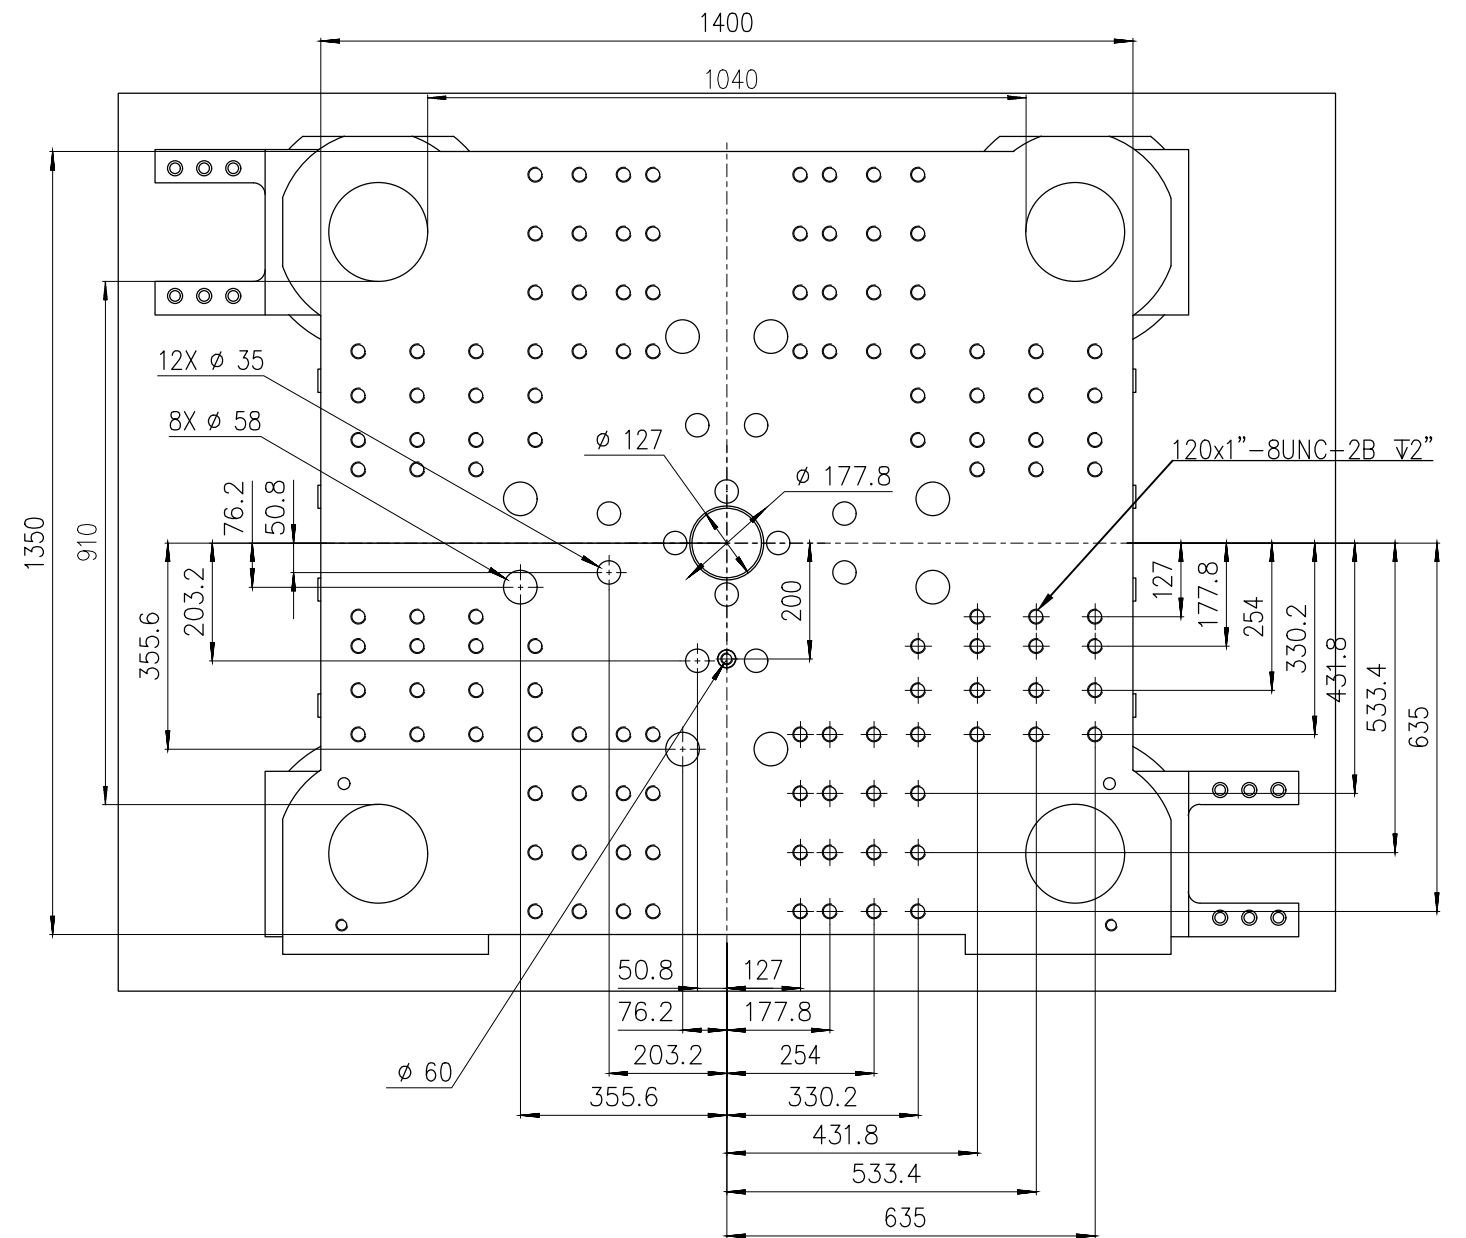

Moving Platen



Absolute Haitian Corporation
33 Southgate St. Worcester, MA
T: +1 508-792-4305
www.absolutehaitian.com

Title: JUV 6500 Fixed & Moving Platens Drawing			
Machine Model: JUV 6500		Sheet: 1 of 1	
Machine Serial Number:		Drawn By: Harry	Date: 1/9/2024
Machine Tonnage:		Chkd By: LEON XIE	Date: 1/9/2024
Revision	Date:	Drawing #:	NOT TO SCALE
Rev #: 1			Size: 11 X 17 "B"
Rev #: 2			Units: mm / [in]
Rev #: 3			Material:
Rev #: 4			Part:
Rev #: 5			Part:

PLEASE READ:


The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes:

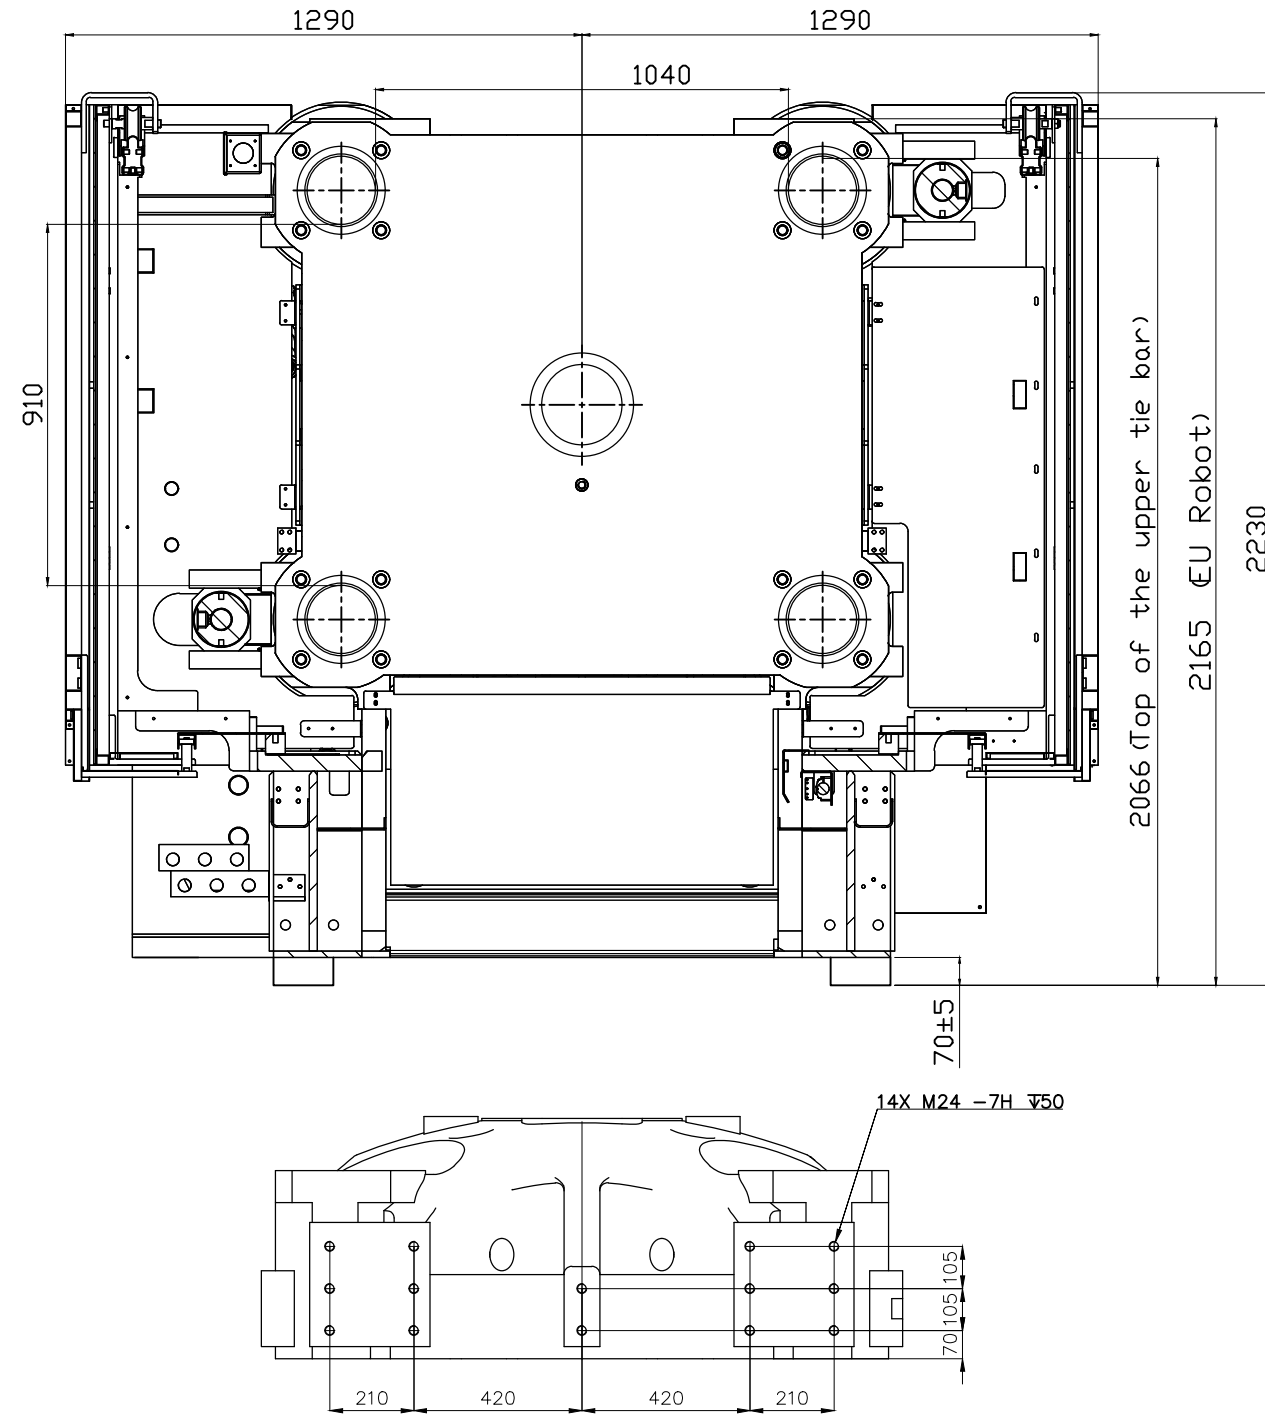

Absolute Haitian Corporation
33 Southgate St. Worcester, MA
T:+1 508-792-4305
www.absolutehaitian.com

Title: JU V 6500-4650 Robot Mounting Drawing

Machine Model: JU V 6500-4650

Machine Serial Number:

Machine Tonnage:

Sheet: 1 of 1

Drawn By: Harry

Date: 4/9/2024

Chkd By: LEON XIE

Date: 4/9/2024

NOT TO SCALE

Size: 11 X 17 "B"

Units: mm / [in]

Material:

Part:

Part:

Part:

Part:

Part:

PLEASE READ:

The designs on this drawing were validated using machine manufacturer's drawings and/or information supplied by Absolute or the customer. It is the responsibility of the customer to review and confirm that all dimensions are consistent with the application intended and in accordance with the facility requirements for space, part clearance, overhead clearance, or any other interference. By signing this document, the customer accepts full responsibility for this design and application.

Customer:

Customer Approval:

Authorized Signature

Notes: